


E Series

TRIAC Dimming LED Driver

可控硅调光LED驱动器

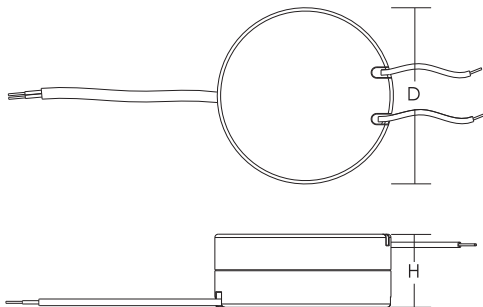

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions DxH 尺寸 (mm)	Weight 重量 (g)
RSD18007E	220-240	7	180	32-40	0.95	-20...+50	85	SELV	53x22	50
RSD35005E	220-240	5	350	8-14	0.95	-20...+50	85	SELV	53x22	50
RSD35007E	220-240	7	350	14-20	0.95	-20...+50	85	SELV	53x22	50
RSD50007E	220-240	7	500	8-14	0.95	-20...+50	85	SELV	53x22	50
RSD50010E	220-240	10	500	14-21	0.95	-20...+50	85	SELV	53x22	50

- Dimmable with leading edge or trailing edge dimmer
 - Constant current driver
 - Protections: opencircuit, shortcircuit, overload, overtemperature
 - Simple installation
 - SELV equivalent
 - Protection class II
 - Dimming range 10...100%
- 适用普通可控硅前切相或后切相调光器
 - 恒流驱动
 - 输出开路, 短路, 过载和超温保护
 - 安装经济便捷
 - 符合安全特低电压标准
 - 保护等级 II
 - 调光范围 10...100%光通量

