


ANTIDARK

EASY W4100 datasheet

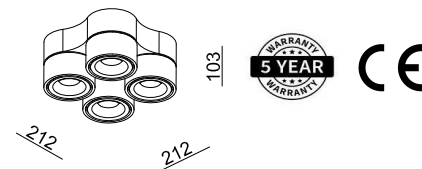

W4100

4X10W LED. Dimmable. 230V. 2700K. 4X643lm. 64 lm/W. BA32°. CRI90+. A -> A++. 35.000h. IP20. 360° Vertical | 90° Horizontal
Ø:10cm X4. H: 10.5cm. L: 21.2cm. Aluminium base | PVC screen. 5 year warranty.

4x10W LED. Dæmpbar. 230V. 2700K. 4x643lm. 64 lm/W. BA32°. CRI90+. A -> A++. 35.000h. IP20. 360° Vertikal | 90° Horisontal
Ø:10cm X4. H: 10.5cm. L: 21.2cm. Aluminiums base | PVC skærm. 5 års garanti.

2-215-12-1
White/Hvid
EAN 5706872019069

W4100 wirehole

4X10W LED. Dimmable. 230V. 2700K. 4X643lm. 64 lm/W. BA32°. CRI90+. A -> A++. 35.000h. IP20. 360° Vertical | 90° Horizontal
Ø:10cm X4. H: 10.5cm. L: 21.2cm. Aluminium base | PVC screen. With wire hole cutout. 5 year warranty.

4x10W LED. Dæmpbar. 230V. 2700K. 4x643lm. 64 lm/W. BA32°. CRI90+. A -> A++. 35.000h. IP20. 360° Vertikal | 90° Horisontal
Ø:10cm X4. H: 10.5cm. L: 21.2cm. Aluminiums base | PVC skærm. Med ledningshul. 5 års garanti.

2-215-12-10
White/Hvid
EAN 5706872019892