


400/T WH PULL

Cod. 042564 -

Interruttore cilindrico unipolare a tirante smontabile con morsetto di terra

Rewireable cylindrical single pole cord-operated switch with earth terminal

- Design innovativo e brevettato
- Dimensioni compatte
- Innovative and patented design
- Compact dimensions

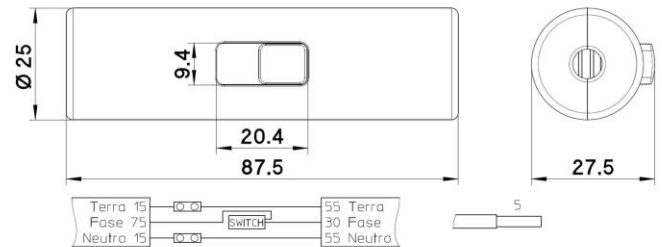

Varianti – Variants
Cod. 042424 - nero / black



ITA
Documentazione online
- [LINK PAGINA PRODOTTO](#) -



ENG
Online documents
- [WEBPAGE LINK](#) -

400/T WH PULL

Cod. 042564 -

Cod. 042564

Materiale	Material	termoplastico / thermoplastic resin
Tensione nominale	Rated voltage	250V
Carico resistivo	Resistive load	2A
Carico lampada	Tungsten lamp load	0,5A
Corrente nominale	Rated current	max 75W lamp led
Trattamento/Colore	Color/Treatment	bianco / white
Tipo e sezione cavi	Type and cross sections	piatti H03VVH2-F 2x0,75mm ² o tondi H03VV-F 2x-3x0,75mm ² piatti H03V2V2H2-F 2x0,75mm ² o tondi H03V2V2-F 2x-3x0,75mm ² T90°C / flat H03VVH2-F 2x0,75mm ² or round cable H03VV-F 2x - 3x0,75mm ² / flat H03V2V2H2-F 2x0,75mm ² or round cable H03V2V2F 2x - 3x0,75mm ² T90°C
Presenza morsetto di terra	Earth Terminal	Sì / Yes
Dimensioni	Dimensions	diam. 25 x 88 mm
Tipologia morsetti	Terminals	a vite / screw type
Peso pezzo	Item weight	27,8 g.
Pz. per confezione	Pieces per unit	100
Dimensione confezione	Size of packaging	16 x 28 x 17,5 cm

ARDITI nell'ambito della normativa tecnica adottata, si riserva il diritto di apportare (in ogni momento e senza obbligo di preavviso) tutte le modifiche che, a proprio insindacabile giudizio, ritenesse opportune per migliorare la funzionalità e le prestazioni dei prodotti, nonché per rispondere a proprie esigenze tecnologiche e produttive. / Within the framework of the adopted technical standards, ARDITI reserves the right to make all those changes (at any time and without prior notice) that, in its final judgement, are needed to improve the functions and performances of the products, as well as to meet the company's technological and production requirements.