

# ANTIDARK


EASY



DOT



MOON



OCULUS



**DEFY DARKNESS - EMBRACE LIGHT**

Since the dawn of time, man has depended on the existence of light.

The sun forced darkness to retreat into the shadows and made life possible.

In our modern lives we still depend on light in order to live outside the darkness.

Today, light comes from light sources and fixtures that are functional, energy efficient and match our interior design.

ANTIDARK is a Danish lighting company that has designed lighting fixtures for over 30 years.

Every ANTIDARK lighting fixture is made with great love for light, functional quality and modern Scandinavian design.

Our mission at ANTIDARK is to bring quality light into your life.

Mennesket har, siden tidernes morgen, været afhængigt af lys for at eksistere.

Solen tvang mørket til at fortrække ind i skyggerne og gjorde livet muligt.

Vi er stadig afhængige af lys i vores moderne liv - for at leve udenfor mørket.

I dag kommer vores lys fra lyskilder og lamper der er funktionelle, energieffektive og matcher vores indretning.

ANTIDARK er et dansk belysningsfirma, der har designet lamper i mere end 30 år.

Alle ANTIDARK lamper er skabt med kærlighed til lyset, teknisk kvalitet og moderne Skandinavisk design.

Vores mission hos ANTIDARK er at bringe kvalitets belysning ind i dit liv.

**ANTIDARK**

EASY



# LOVE IS NOT CONSOLATION. IT IS LIGHT.

*Simone Weil, French philosopher*

The EASY W75/W100 spot fixtures are perfect for ceiling or wall.  
These minimalist design LED spots are a great addition to any room.

EASY W75/W100 spotarmaturer er perfekte spots til loftet eller væggen.  
LED spots i et diskret, minimalistisk design, der matcher ethvert rum.

EASY



EASY W75

BLACK/WHITE

7W LED | Dimmable  
2700K | Ø:7.5cm | H:9.5cm | Black/White  
See technical pages in the back for more information.



EASY W75

SORT/HVID

7W LED | Dæmpbar  
2700K | Ø:7.5cm | H:9.5cm | Sort/Hvid  
Se de tekniske sider bagerst for yderligere information.

EASY W100/W100HPBLACK/WHITE

10W LED | Dimmable  
2700K | Ø:10cm | H:10.5cm | Black/White

18W LED | Dimmable  
2700K | Ø:10cm | H:10.5cm | Black/White

See technical pages in the back for more information.

EASY W100/W100HPSORT/HVID

10W LED | Dæmpbar  
2700K | Ø:10cm | H:10.5cm | Sort/Hvid

18W LED | Dæmpbar  
2700K | Ø:10cm | H:10.5cm | Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

EASY





# THERE IS A CRACK IN EVERYTHING. THAT'S HOW THE LIGHT GETS IN.

*Leonard Cohen, Canadian songwriter*

The EASY W275/W2100 double spots gives you greater light control from a single light fixture.

Turn or rotate each spot to point the light at the exact place you need illuminated.

EASY W275/W2100 dobbelt spotsene giver større lyskontrol fra en enkelt lampe. Drej eller roter hver enkelt spot, så lyset rammer præcist det sted der skal belyses.

EASY



EASY W275

BLACK/WHITE

2X7W LED | Dimmable

2700K | Ø:7.5cm x2 | H:9cm | L:16cm | Black/White

See technical pages in the back for more information.

EASY W275

SORT/HVID

2X7W LED | Dæmpbar

2700K | Ø:7.5cm x2 | H:9cm | L:16cm | Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

EASY



EASY W2100

BLACK/WHITE

2X10W LED | Dimmable  
2700K | Ø:10cm x2 | H:10.5cm | L:21cm | Black/White  
See technical pages in the back for more information.

EASY W2100

SORT/HVID

2X10W LED | Dæmpbar  
2700K | Ø:10cm x2 | H:10.5cm | L:21cm | Sort/Hvid  
Se de tekniske sider bagerst for yderligere information.

EASY





# WE MUST BRING OUR OWN LIGHT TO THE DARKNESS.

*Charles Bukowski, American author*

Need even more light options? Try the EASY W3100/W4100 spots.  
One fixture with three or four spots - perfect for rooms where space is limited.

Brug for endnu mere lys? Prøv EASY W3100/W4100.  
Ét armatur med tre eller fire spots – perfekt til rum med begrænset plads.

EASY



#### EASY W3100

WHITE

3X10W LED | Dimmable  
2700K | Ø:10cm x3 | H:10.3cm | L:32.4cm | White  
See technical pages in the back for more information.

3X10W LED | Dæmpbar  
2700K | Ø:10cm x3 | H:10.3cm | L:32.4cm | Hvid  
Se de tekniske sider bagerst for yderligere information.

#### EASY W4100

WHITE

4X10W LED | Dimmable  
2700K | Ø:10cm x4 | H:10.3cm | L:21.2cm | White  
See technical pages in the back for more information.

4X10W LED | Dæmpbar  
2700K | Ø:10cm x4 | H:10.3cm | L:21.2cm | Hvid  
Se de tekniske sider bagerst for yderligere information.

**DARKNESS WILL ALWAYS  
TRY TO EXTINGUISH THE  
LIGHT. THE LIGHT WILL  
ALWAYS TRY TO REPRESS  
THE DARKNESS.**

*Morgan Rhodes, American author*

EASY



The EASY series is completed with these 3 build-in spots.  
Scandinavian designed spots that match any modern ceiling or room.

EASY serien er komplet med disse 3 indbygnings spots.  
Skandinavisk designede spots, der matcher ethvert moderne loft eller rum.



EASY RC100



EASY B75



EASY B100

---

B75 | 7W LED | Dimmable  
2700K | Ø:7.5cm | H:5.5cm | Cutout Ø:6.8cm | White

B100 | 10W LED | Dimmable  
2700K | Ø:10cm | H:6cm | Cutout Ø:9cm | White

RC100 | 7W LED | Dimmable  
2700K | Ø:10.5cm | Cutout Ø:9.8cm  
Recessed depth:7.8cm | White

See technical pages in the back for more information.

---

B75 | 7W LED | Dæmpbar  
2700K | Ø:7.5cm | H:5.5cm | Udsækering Ø:6.8cm | Hvid

B100 | 10W LED | Dæmpbar  
2700K | Ø:10cm | H:6cm | Udsækering Ø:9cm | Hvid

RC100 | 7W LED | Dæmpbar  
2700K | Ø:10.5cm | Udsækering Ø:9.8cm  
Indbygning dybde:7.8cm | Hvid

Se de tekniske sider bagerst for yderligere information

MOON





**LOOK AT HOW A SINGLE  
CANDLE CAN BOTH DEFY  
AND DEFINE THE DARK-  
NESS.**

*Anne Frank, author*

The Moon series - a perfect circle of dimmable soft light.  
Use as gentle illumination or as a stunning wall decoration.

Moon serien – en perfekt cirkel af dæmpbart blødt lys.  
Anvend som behagelig loftsbelysning eller som en iøjnefaldende væg dekoration.

MOON



MOON C160

BLACK/WHITE

12W LED | Dimmable  
2700K | Ø:16cm | H:6cm| Black/White

12W LED | Dimmable  
3000K | Ø:16cm | H:6cm| Black/White

See technical pages in the back for more information.

MOON C160

SORT/HVID

12W LED | Dæmpbar  
2700K | Ø:16cm | H:6cm| Sort/Hvid

12W LED | Dæmpbar  
3000K | Ø:16cm | H:6cm| Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

**MOON C260****BLACK/WHITE**

15W LED | Dimmable  
2700K | Ø:26cm | H:8cm | Black/White

15W LED | Dimmable  
3000K | Ø:26cm | H:8cm | Black/White

See technical pages in the back for more information.

**MOON C260****SORT/HVID**

15W LED | Dæmpbar  
2700K | Ø:26cm | H:8cm | Sort/Hvid

15W LED | Dæmpbar  
3000K | Ø:26cm | H:8cm | Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

MOON



MOON C450

BLACK/WHITE

29W LED | Dimmable  
2700K | Ø:45cm | H:8cm| Black/White

29W LED | Dimmable  
3000K | Ø:45cm | H:8cm| Black/White

See technical pages in the back for more information.



MOON C450

SORT/HVID

29W LED | Dæmpbar  
2700K | Ø:45cm | H:8cm| Sort/Hvid

29W LED | Dæmpbar  
3000K | Ø:45cm | H:8cm| Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

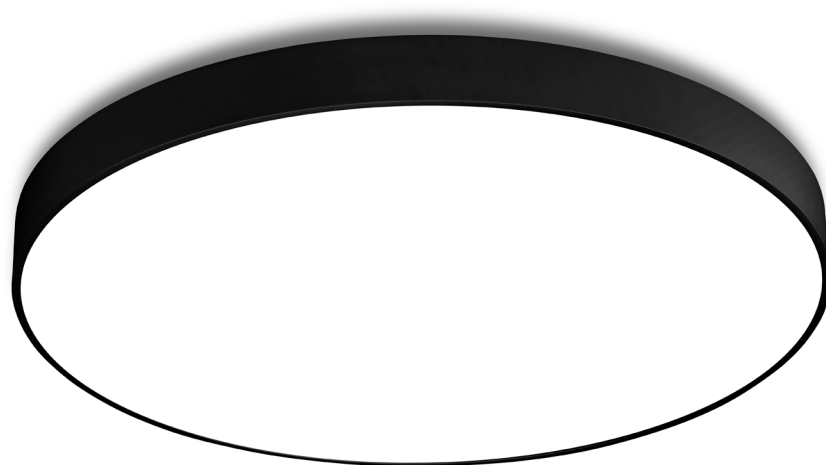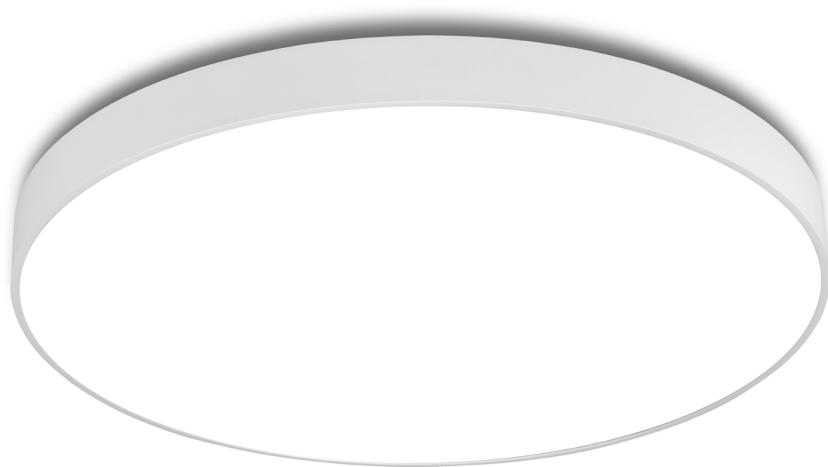

**MOON C600**

**BLACK/WHITE**

43W LED | Dimmable  
3000K | Ø:60cm | H:8cm | Black/White

See technical pages in the back for more information.


**MOON C600**

**SORT/HVID**

43W LED | Dæmpbar  
3000K | Ø:60cm | H:8cm | Sort/Hvid

Se de tekniske sider bagerst for yderligere information.

DOT

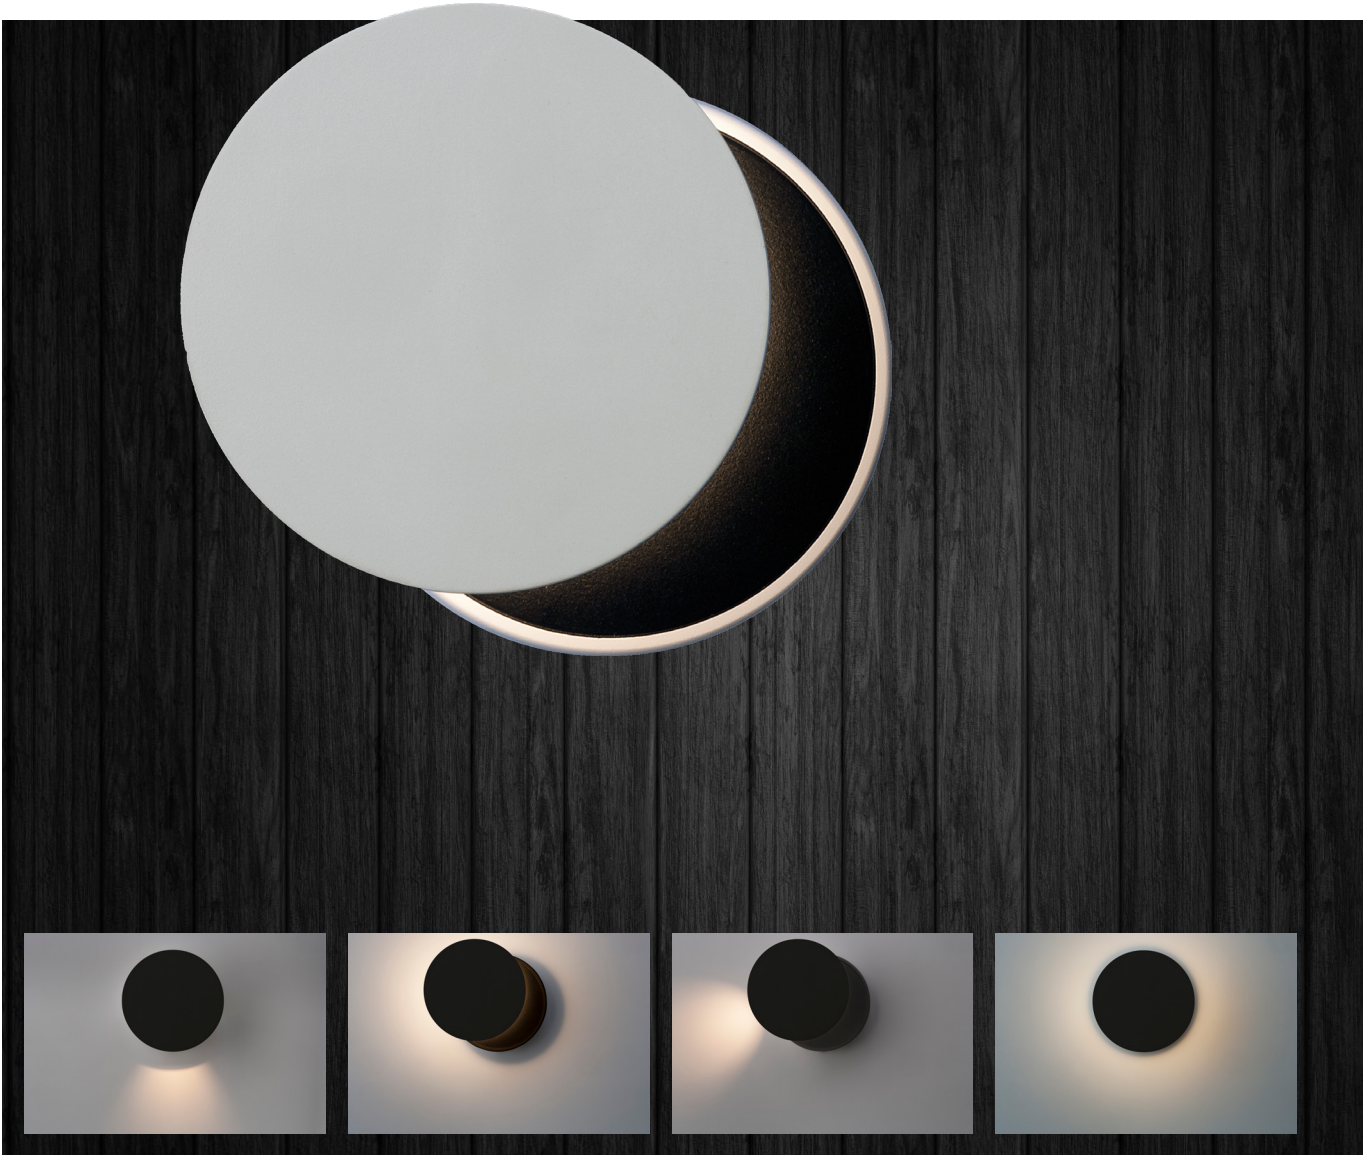

# DON'T BE AFRAID OF THE DARK. SHINE!

*Vera Nazarian, Armenian-American author*



Light according to your needs – meet the DOT.

A simplistic touch-dimmable wall lamp with both ambient light and reading light in one.

Lys der matcher dit behov – mød DOT.

En minimalistisk touch dæmpbar væglampe med både stemningsbelysning og læselampe i én.

## DOT



### DOT W120

### BLACK/WHITE

7W+3W LED | Touch Dimmable  
2700K | Ø:12cm | D:8.4cm | Black/White  
See technical pages in the back for more information.

### DOT W120

### SORT/HVID

7W+3W LED | Touch dæmpbar  
2700K | Ø:12cm | D:8.4cm | Sort/Hvid  
Se de tekniske sider bagerst for yderligere information.

DOT



OCULUS





**FEAR CAN ONLY  
GROW IN DARKNESS.  
ONCE YOU FACE  
FEAR WITH LIGHT,  
YOU WIN.**

*Steve Maraboli, speaker and author*

The OCULUS – an eye for light.

Use it on the ceiling, wall or as a table uplight with the included mounting plate.

OCULUS – et øje for lys.

Monter den på loftet, væggen eller som en bord uplight med den medfølgende monteringsplade.

**OCULUS**



**OCULUS S100**

**BLACK/WHITE**

9W LED | Dimmable  
2700K | Ø:10.2cm | D:8.4cm | Black/White  
See technical pages in the back for more information.



**OCULUS S100**

**SORT/HVID**

9W LED | Dæmpbar  
2700K | Ø:10.2cm | D:8.4cm | Sort/Hvid  
Se de tekniske sider bagerst for yderligere information.

TECHNICAL DATA / TEKNISKE DATA

EASY

W75

|             |                                                                              |                                                          |
|-------------|------------------------------------------------------------------------------|----------------------------------------------------------|
| 2-215-08-1  | EASY W75 White   7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++.        | 35.000h. IP20. Ø:7.5cm. H: 9.5cm.                        |
| 2-215-08-1  | EASY W75 Hvid   7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++.          | 35.000h. IP20. Ø:7.5cm. H: 9.5cm.                        |
| 2-215-08-2  | EASY W75 Black   7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++.        | 35.000h. IP20. Ø:7.5cm. H: 9.5cm.                        |
| 2-215-08-2  | EASY W75 Sort   7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++.          | 35.000h. IP20. Ø:7.5cm. H: 9.5cm.                        |
| 2-215-08-10 | EASY W75 White w/hole   7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++. | 35.000h. IP20. Ø:7.5cm. H: 9.5cm. With wire hole cutout. |
| 2-215-08-10 | EASY W75 Hvid m/hul   7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++.    | 35.000h. IP20. Ø:7.5cm. H: 9.5cm. Med ledningshul.       |
| 2-215-08-20 | EASY W75 Black w/hole   7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++. | 35.000h. IP20. Ø:7.5cm. H: 9.5cm. With wire hole cutout. |
| 2-215-08-20 | EASY W75 Sort m/hul   7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++.    | 35.000h. IP20. Ø:7.5cm. H: 9.5cm. Med ledningshul.       |

W100

|             |                                                                                |                                                          |
|-------------|--------------------------------------------------------------------------------|----------------------------------------------------------|
| 2-215-05-1  | EASY W100 White   10W. Dimmable. 2700K. 643lm. BA32°. CRI90+. A -> A++.        | 35.000h. IP20. Ø:10cm. H: 10.5cm.                        |
| 2-215-05-1  | EASY W100 Hvid   10W. Dæmpbar. 2700K. 643lm. BA32°. CRI90+. A -> A++.          | 35.000h. IP20. Ø:10cm. H: 10.5cm.                        |
| 2-215-05-2  | EASY W100 Black   10W. Dimmable. 2700K. 643lm. BA32°. CRI90+. A -> A++.        | 35.000h. IP20. Ø:10cm. H: 10.5cm.                        |
| 2-215-05-2  | EASY W100 Sort   10W. Dæmpbar. 2700K. 643lm. BA32°. CRI90+. A -> A++.          | 35.000h. IP20. Ø:10cm. H: 10.5cm.                        |
| 2-215-05-10 | EASY W100 White w/hole   10W. Dimmable. 2700K. 643lm. BA32°. CRI90+. A -> A++. | 35.000h. IP20. Ø:10cm. H: 10.5cm. With wire hole cutout. |
| 2-215-05-10 | EASY W100 Hvid m/hul   10W. Dæmpbar. 2700K. 643lm. BA32°. CRI90+. A -> A++.    | 35.000h. IP20. Ø:10cm. H: 10.5cm. Med ledningshul.       |
| 2-215-05-20 | EASY W100 Black w/hole   10W. Dimmable. 2700K. 643lm. BA32°. CRI90+. A -> A++. | 35.000h. IP20. Ø:10cm. H: 10.5cm. With wire hole cutout. |
| 2-215-05-20 | EASY W100 Sort m/hul   10W. Dæmpbar. 2700K. 643lm. BA32°. CRI90+. A -> A++.    | 35.000h. IP20. Ø:10cm. H: 10.5cm. Med ledningshul.       |

EASY

W100

- 2-215-07-1

EASY W100 HP White | 18W. Dimmable. 2700K. 1250lm. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm. H: 10.5cm.
- 2-215-07-1

EASY W100 HP Hvid | 18W. Dæmpbar. 2700K. 1250lm. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm. H: 10.5cm.
- 2-215-07-2

EASY W100 HP Black | 18W. Dimmable. 2700K. 1250lm. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm. H: 10.5cm.
- 2-215-07-2

EASY W100 HP Sort | 18W. Dæmpbar. 2700K. 1250lm. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm. H: 10.5cm.

W275

- 2-215-10-1

EASY W275 White | 2X7W. Dimmable. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm.
- 2-215-10-1

EASY W275 Hvid | 2X7W. Dæmpbar. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm.
- 2-215-10-2

EASY W275 Black | 2X7W. Dimmable. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm.
- 2-215-10-2

EASY W275 Sort | 2X7W. Dæmpbar. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm.
- 2-215-10-10

EASY W275 White w/hole | 2X7W. Dimmable. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm. With wire hole cutout.
- 2-215-10-10

EASY W275 Hvid m/hul | 2X7W. Dæmpbar. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm. Med ledningshul.
- 2-215-10-20

EASY W275 Black w/hole| 2X7W. Dimmable. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm. With wire hole cutout.
- 2-215-10-20

EASY W275 Sort m/hul | 2X7W. Dæmpbar. 2700K. 477lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:7.5cm X2. H: 9cm. L:16cm. Med ledningshul.

W2100

- 2-215-09-1

EASY W2100 White | 2X10W. Dimmable. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm.
- 2-215-09-1

EASY W2100 Hvid | 2X10W. Dæmpbar. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm.
- 2-215-09-2

EASY W2100 Black | 2X10W. Dimmable. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm.
- 2-215-09-2

EASY W2100 Sort | 2X10W. Dæmpbar. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.

35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm.

EASY

W2100

- 2-215-09-10EASY W2100 White w/hole | 2X10W. Dimmable. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm. With wire hole cutout.
- 2-215-09-10EASY W2100 Hvid m/hul | 2X10W. Dæmpbar. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm. Med ledningshul.
- 2-215-09-20EASY W2100 Black w/hole | 2X10W. Dimmable. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm. With wire hole cutout.
- 2-215-09-20EASY W2100 Sort m/hul | 2X10W. Dæmpbar. 2700K. 643lm X2. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X2. H: 10.5cm. L:21cm. Med ledningshul.

W3100

- 2-215-11-1EASY W3100 White | 3X10W. Dimmable. 2700K. 643lm X3. BA32°. CRI90+. A -> A++. 35.000h.  
IP20. Ø:10cm X3. H: 10.3cm. L:32.4cm.
- 2-215-11-1EASY W3100 Hvid | 3X10W. Dæmpbar. 2700K. 643lm X3. BA32°. CRI90+. A -> A++. 35.000h.  
IP20. Ø:10cm X3. H: 10.3cm. L:32.4cm.
- 2-215-11-10EASY W3100 White w/hole | 3X10W. Dimmable. 2700K. 643lm X3. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X3. H: 10.3cm. L:32.4cm. With wire hole cutout.
- 2-215-11-1EASY W3100 Hvid m/hul | 3X10W. Dæmpbar. 2700K. 643lm X3. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X3. H: 10.3cm. L:32.4cm. Med ledningshul.

W4100

- 2-215-12-1EASY W4100 White | 4X10W. Dimmable. 2700K. 643lm X4. BA32°. CRI90+. A -> A++. 35.000h.  
IP20. Ø:10cm X4. H: 10.3cm. L:21.2cm.
- 2-215-12-1EASY W4100 Hvid | 4X10W. Dæmpbar. 2700K. 643lm X4. BA32°. CRI90+. A -> A++. 35.000h.  
IP20. Ø:10cm X4. H: 10.3cm. L:21.2cm.
- 2-215-12-10EASY W4100 White w/hole | 4X10W. Dimmable. 2700K. 643lm X4. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X4. H: 10.3cm. L:21.2cm. With wire hole cutout.
- 2-215-12-1EASY W4100 Hvid m/hul | 4X10W. Dæmpbar. 2700K. 643lm X4. BA32°. CRI90+. A -> A++.  
35.000h. IP20. Ø:10cm X4. H: 10.3cm. L:21.2cm. Med ledningshul.

B75

- 2-215-03-1EASY B75 White | 7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø7.5cm. H:5.5cm. Cutout Ø:6.8cm.
- 2-215-03-1EASY B75 Hvid | 7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø7.5cm. H:5.5cm. Udskæring: Ø:6.8cm.

B100

- 2-215-04-1EASY B100 White | 10W. Dimmable. 2700K. 643lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø10cm. H:6cm. Cutout Ø:9cm.
- 2-215-04-1EASY B100 Hvid | 10W. Dæmpbar. 2700K. 643lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø10cm. H:6cm. Udskæring: Ø:9cm.

RC100

- 2-510-02-1EASY RC100 White | 7W. Dimmable. 2700K. 477lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø10.5cm. Cutout Ø:9.8cm. Recessed D:7.8cm.
- 2-510-02-1EASY RC100 Hvid | 7W. Dæmpbar. 2700K. 477lm. BA32°. CRI90+. A -> A++. 35.000h. IP20.  
Ø10.5cm. Udskæring: Ø:9.8cm. Indbygning: D:7.8cm.

MOON

C160  
2700K

- 2-512-05-1 MOON C160 White | 12W LED. Dimmable. 2700K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-05-1 MOON C160 Hvid | 12W LED. Dæmpbar. 2700K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-05-2 MOON C160 Black | 12W LED. Dimmable. 2700K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-05-2 MOON C160 Sort | 12W LED. Dæmpbar. 2700K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.

C260  
2700K

- 2-512-06-1 MOON C260 White | 15W LED. Dimmable. 2700K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-06-1 MOON C260 Hvid | 15W LED. Dæmpbar. 2700K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-06-2 MOON C260 Black | 15W LED. Dimmable. 2700K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-06-2 MOON C260 Sort | 15W LED. Dæmpbar. 2700K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.

C450  
2700K

- 2-512-07-1 MOON C450 White | 29W LED. Dimmable. 2700K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-07-1 MOON C450 Hvid | 29W LED. Dæmpbar. 2700K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-07-2 MOON C450 Black | 29W LED. Dimmable. 2700K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-07-2 MOON C450 Sort | 29W LED. Dæmpbar. 2700K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.

C160  
3000K

- 2-512-01-1 MOON C160 White | 12W LED. Dimmable. 3000K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-01-1 MOON C160 Hvid | 12W LED. Dæmpbar. 3000K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-01-2 MOON C160 Black | 12W LED. Dimmable. 3000K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.
- 2-512-01-2 MOON C160 Sort | 12W LED. Dæmpbar. 3000K. 930lm. CRI90+. A -> A++. 35.000h. IP20. Ø:16cm. H:6cm.

C260  
3000K

- 2-512-02-1 MOON C260 White | 15W LED. Dimmable. 3000K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-02-1 MOON C260 Hvid | 15W LED. Dæmpbar. 3000K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-02-2 MOON C260 Black | 15W LED. Dimmable. 3000K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.
- 2-512-02-2 MOON C260 Sort | 15W LED. Dæmpbar. 3000K. 1205lm. CRI90+. A -> A++. 35.000h. IP20. Ø:26cm. H:8cm.

MOON

C450  
3000K

- 2-512-04-1 MOON C450 White | 29W LED. Dimmable. 3000K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-04-1 MOON C450 Hvid | 29W LED. Dæmpbar. 3000K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-04-2 MOON C450 Black | 29W LED. Dimmable. 3000K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.
- 2-512-04-2 MOON C450 Sort | 29W LED. Dæmpbar. 3000K. 2745lm. CRI90+. A -> A++. 35.000h. IP20. Ø:45cm. H:8cm.

C600  
3000K

- 2-512-03-1 MOON C600 White | 43W LED. Dimmable. 3000K. 3809lm. CRI90+. A -> A++. 35.000h. IP20. Ø:60cm. H:8cm.
- 2-512-03-1 MOON C600 Hvid | 43W LED. Dæmpbar. 3000K. 3809lm. CRI90+. A -> A++. 35.000h. IP20. Ø:60cm. H:8cm.
- 2-512-03-2 MOON C600 Black | 43W LED. Dimmable. 3000K. 3809lm. CRI90+. A -> A++. 35.000h. IP20. Ø:60cm. H:8cm.
- 2-512-03-2 MOON C600 Sort | 43W LED. Dæmpbar. 3000K. 3809lm. CRI90+. A -> A++. 35.000h. IP20. Ø:60cm. H:8cm.

MOON  
WIREKIT

- 8-215-00-1 MOON suspension wirekit / wiresæt til loftophæng.

DOT  
W120

- 2-216-01-1 DOT W120 White | 7W LED + 3W LED reading light. Dimmable touch switch. 2700K. CRI80. A -> A++. 35.000h. IP20. Ø:12cm. D:8cm.
- 2-216-01-1 DOT W120 Hvid | 7W LED + 3W LED læselys. Dæmpbar touch. 2700K. CRI80. A -> A++. 35.000h. IP20. Ø:12cm. D:8cm.
- 2-216-01-2 DOT W120 Black | 7W LED + 3W LED reading light. Dimmable touch switch. 2700K. CRI80. A -> A++. 35.000h. IP20. Ø:12cm. D:8cm.
- 2-216-01-2 DOT W120 Sort | 7W LED + 3W LED læselys. Dæmpbar touch. 2700K. CRI80. A -> A++. 35.000h. IP20. Ø:12cm. D:8cm.

OCULUS  
S100

- 2-216-10-1 OCULUS S100 White | 9W LED. Dimmable. 2700K. 730lm. BA 33°. CRI 90+ A->A++. 35.000h. IP 20. Ø:10.2 cm. D:8.4cm. With mounting plate.
- 2-216-10-1 OCULUS S100 Hvid | 9W LED. Dæmpbar. 2700K. 730lm. BA 33°. CRI 90+ A->A++. 35.000h. IP 20. Ø:10.2 cm. D:8.4cm. Med monteringsplade.
- 2-216-10-2 OCULUS S100 Black | 9W LED. Dimmable. 2700K. 730lm. BA 33°. CRI 90+ A->A++. 35.000h. IP 20. Ø:10.2 cm. D:8.4cm. With mounting plate.
- 2-216-10-2 OCULUS S100 Sort | 9W LED. Dæmpbar. 2700K. 730lm. BA 33°. CRI 90+ A->A++. 35.000h. IP 20. Ø:10.2 cm. D:8.4cm. Med monteringsplade.

